

PRODUCT FAMILY DATASHEET

DAMP PROOF SLIM VALUE

Damp-proof luminaire with slim housing



AREAS OF APPLICATION

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

PRODUCT BENEFITS

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Very slim housing
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Tool-free electrical connection due to push button connector
- 3 years guarantee
- Easy access to electrical terminal thanks end caps with clip mechanism

PRODUCT FEATURES

- High luminous efficacy: up to 110 lm/W
- Beam angle: 120°
- Type of protection: IP65




TECHNICAL DATA

	Electrical data			Luminaire control gear data	Photometrical data				Light technical data	Dimensions & weight	
Product description	Nominal wattage	Nominal voltage	Mains frequency	Ouput current	Color temper- ature	Luminous flux	Light color (designation)	Color render- ing index Ra	Beam angle	Length	Width
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	36.00 W	220...240 V	50/60 Hz	460 mA	4000 K	4000 lm	Cool White	>80	120 °	1200 mm	35.0 mm
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	36.00 W	220...240 V	50/60 Hz	460 mA	6500 K	4000 lm	Cool Daylight	>80	120 °	1200 mm	35.0 mm
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	50.00 W	220...240 V	50/60 Hz	460 mA	4000 K	5500 lm	Cool White	>80	120 °	1500 mm	35.0 mm
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	50.00 W	220...240 V	50/60 Hz	590 mA	6500 K	5500 lm	Cool Daylight	>80	120 °	1500 mm	35.0 mm

Product description	Height	Product weight	Colors & materials			Temperatures & operating conditions	Lifespan	
			Body material	Product color	Cover material	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	48.0 mm	450.00 g	Polycarbonate (PC)	White	Polycarbonate (PC)	-20...40 °C	30000 h	27000 h
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	48.0 mm	450.00 g	Polycarbonate (PC)	White	Polycarbonate (PC)	-20...40 °C	30000 h	27000 h
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	48.0 mm	510.00 g	Polycarbonate (PC)	White	Polycarbonate (PC)	-20...40 °C	30000 h	27000 h
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	48.0 mm	510.00 g	Polycarbonate (PC)	White	Polycarbonate (PC)	-20...40 °C	30000 h	27000 h

Product description	Lifespan L90 at 25 °C	Capabilities			Certificates & standards	
		Dimmable	Type of connection	Ball shot safe	Protection class	Type of protection
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	19000 h	No	Screwless terminal, 2-Pole	No	II	IP65


Product description	Lifespan L90 at 25 °C	Capabilities			Certificates & standards	
		Dimmable	Type of connection	Ball shot safe	Protection class	Type of protection
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	19000 h	No	Screwless terminal, 2-Pole	No	II	IP65
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	20000 h	No	Screwless terminal, 2-Pole	No	II	IP65
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	20000 h	No	Screwless terminal, 2-Pole	No	II	IP65




DP SLIM VALUE 1200 36 W 4000 K IP65 GY, DP SLIM VALUE 1200 36 W 6500 K IP65 GY




DP SLIM VALUE 1500 50 W 4000 K IP65 GY, DP SLIM VALUE 1500 50 W 6500 K IP65 GY

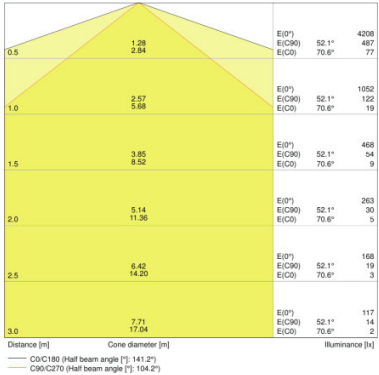


DP SLIM VALUE 1200 36 W 4000 K IP65 GY

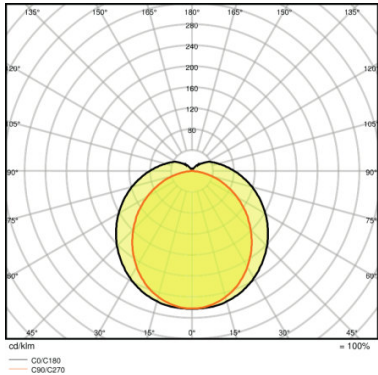

DP SLIM VALUE 1200 36 W 6500 K IP65 GY

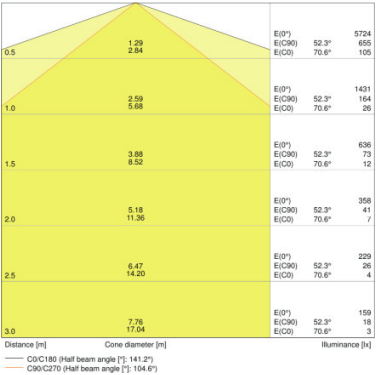

DP SLIM VALUE 1500 50 W 4000 K IP65
GY

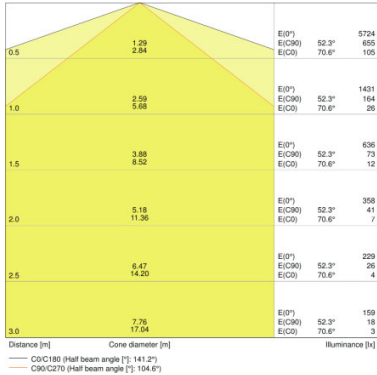

DP SLIM VALUE 1500 50 W 6500 K IP65
GY

EQUIPMENT / ACCESSORIES

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075066465	Shipping carton box 20	1271 mm x 215 mm x 226 mm	14090.00 g	61.76 dm ³
4058075066489	Shipping carton box 20	1271 mm x 215 mm x 226 mm	14090.00 g	61.76 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075066502	Shipping carton box 20	1571 mm x 215 mm x 226 mm	12832.00 g	76.33 dm ³
4058075066526	Shipping carton box 20	1571 mm x 215 mm x 226 mm	16890.00 g	76.33 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.